


carsu® 凯士

Professional LED Optoelectronics

LED高清数码柔光灯

LED HIGH-DEFINITION DIGITAL
LAMBENCY LIGHT CATALOG

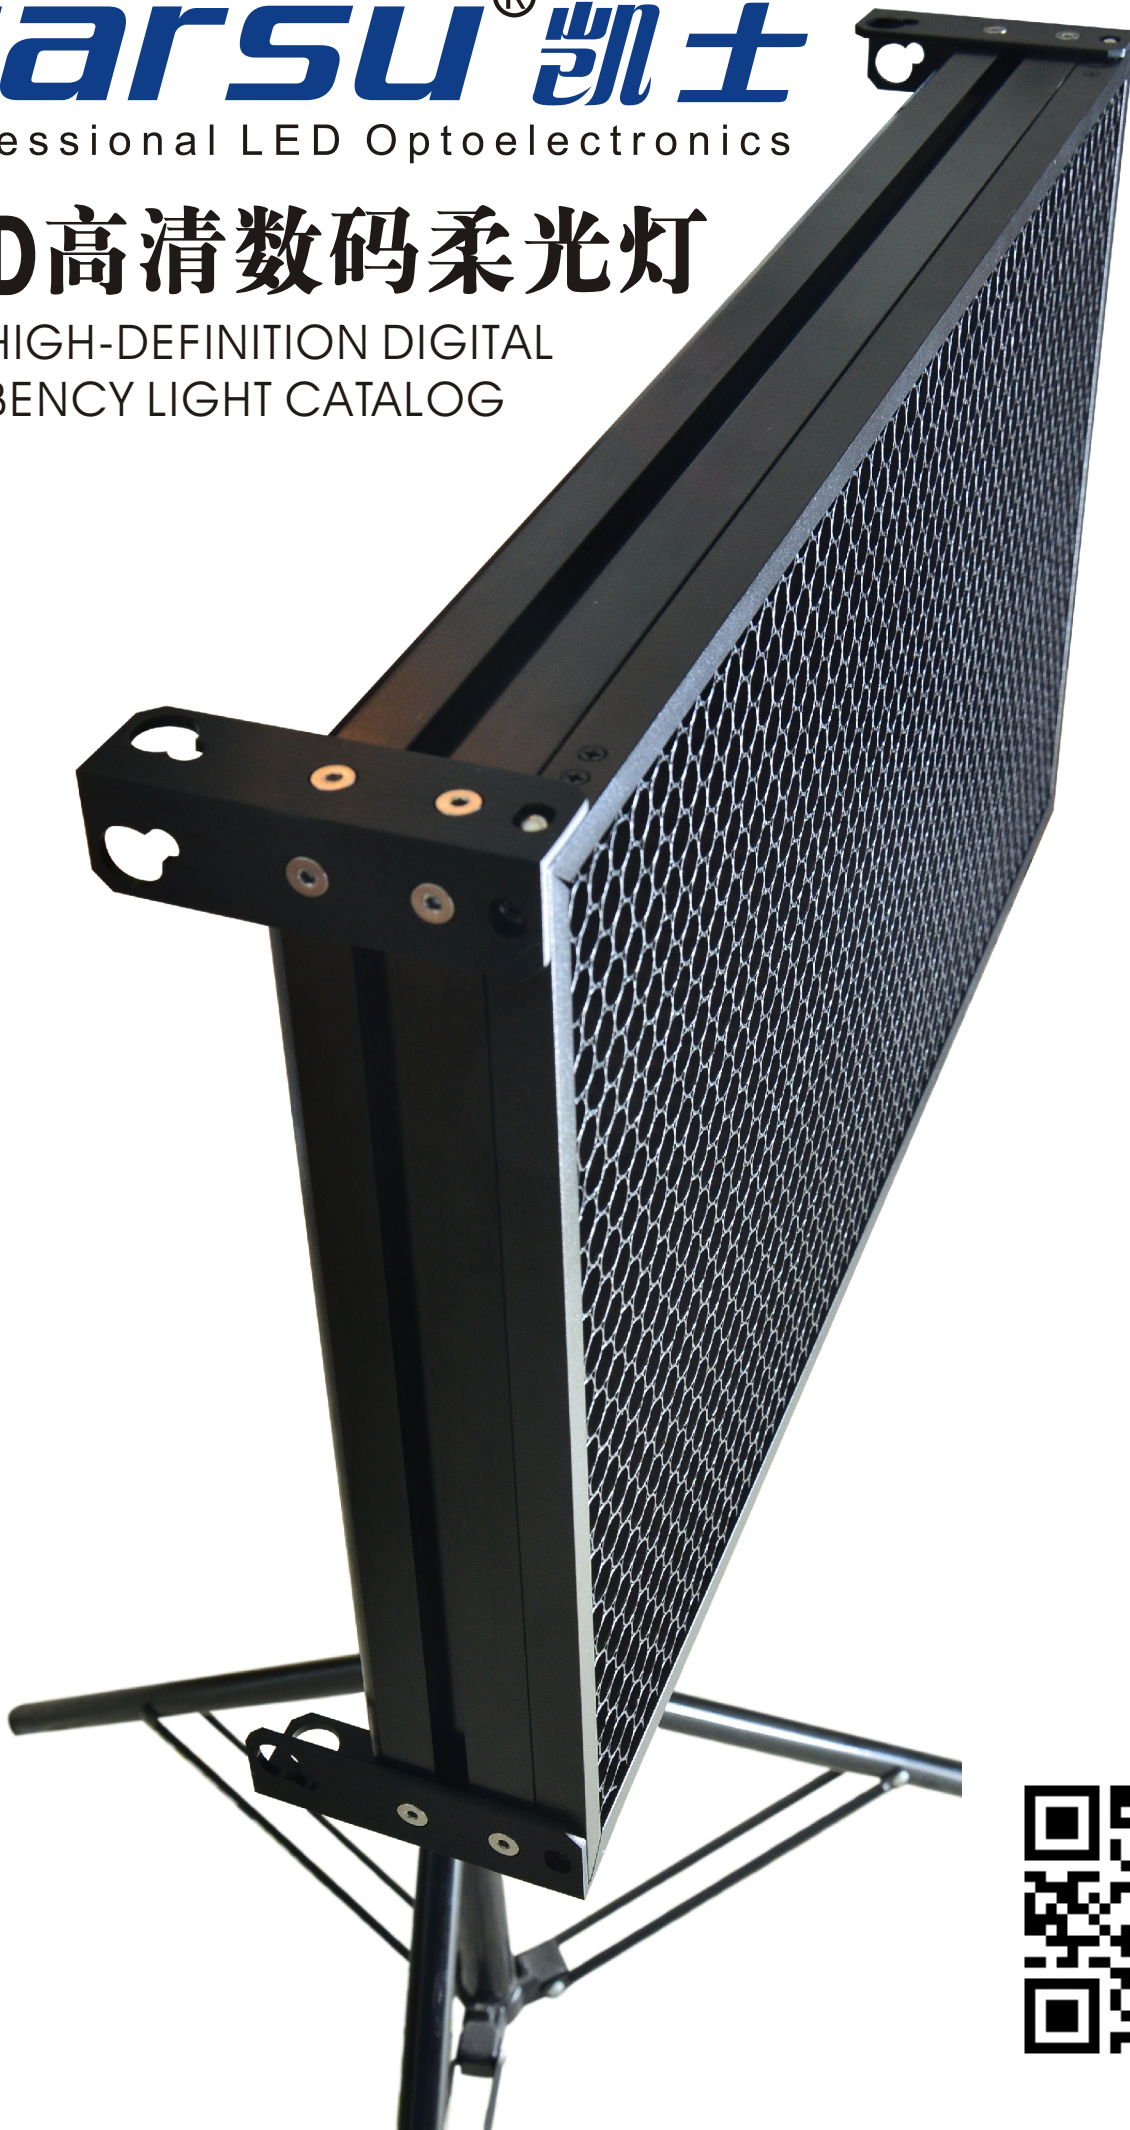

LED高清数码柔光灯(柔光面板)

LED HIGH-DEFINITION DIGITAL LAMBENCY LIGHT

(Soft Diffusion Panel)



CSKS60-1 CSKS60-2
CSKS120-1 CSKS120-2



凯士光电经过多年LED技术研发，全新的巅峰杰作——凯士LED高清数码柔光灯上市，该系列柔光灯为紧凑型、超轻、超亮的高品质LED柔光灯，设计上注重外形、材料、光箱光路、光效、功率、交直流电源及使用体验多种因素，将为行业树立新的标准。针对不同的用户我们对产品分成：柔光面板和远程钻石柔光面板。柔光面板将为拍电影电视和外拍的用户，提供便携耐用、灵活组合的优质LED柔光光源；远程钻石柔光面板将为广电行业、静态摄影和室内照明的用户，提供耐用、灵活多变，强悍高亮度的优质LED柔光光源。目前上市产品尺寸为60cm（2英尺）和120cm（4英尺）的两种尺寸，产品可简易拼接；并带易装蜂窝或易装遮菲，可选中央支架（魔术腿）或U形支架；色温为3200K、5600K和双色温3200K~5600K三种，色彩还原优异可调，光效真正柔和均匀；航空铝合金材料核心构架，使得产品轻便坚固，抗震耐摔，经久耐用，经得起用户高负荷的使用。经过别具匠心的设计及生产一款高品质的专业灯具便呈现在你面前。

After years' of research and develop, CARSU's brand-new masterpiece, LED high-definition digital lambency light is on market now. With compact, ultra-light, ultra-bright and high quality, this series LED light will set up new standards, by laying emphasis on the design of the shape, material, illuminance, power, AC/DC power and usage experience, etc.


According to different users, the lights are divided into soft diffusion panel and remote diamond diffusion panel.

Soft diffusion panel are suitable for film tv and outdoor shooting, by providing portable, combining flexibly high-end LED soft lighting;

Remote diamond diffusion panel are suitable for broadcast industry, portrait photography and indoor shooting, by providing durable, flexible, and super-bright high-end LED soft lighting.

At present, the available two dimensions are 60cm (2 feet) and 120cm (4 feet), which can joinable easily; with louver or barndoors, central bracket (magic arm) or U-type bracket is available. 3200K, 5600K, bi-color 3200K-5600K are for choice; high CRI; even soft light output; Using aviation aluminum alloy core frame material makes the light light-weighted and solid, strong and durable, over-load usage affordable;


At last, a high-end professional LED light with ingenious design is present in front of you.

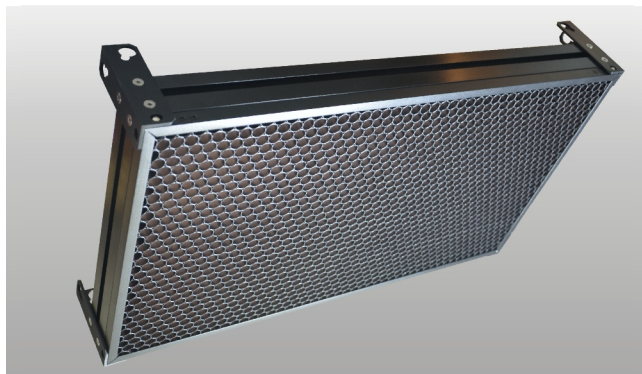

航空箱
Flight Case




安全箱
Travel Case




中央旋转支架(魔术腿) 随灯附送
Central Bracket (magic arm) included



U 形支架 选配件
U-type Bracket



易装蜂窝 随灯附送
Louver included



易装遮菲 选配件
Barndoors

LED高清数码柔光灯(柔光面板)的对应距离照度

Corresponding illumination of LED HIGH-DEFINITION DIGITAL LAMBENCY LIGHT (Soft Diffusion Panel) to different distances

CSKS60-1 CSKS60-2

距离 Distance	1m	2m	3m
照度 Lux@center			
5600K	2172LUX	563LUX	280LUX
3200K	1885LUX	503LUX	251LUX

CSKS120-1 CSKS120-2


距离 Distance	1m	2m	3m
照度 Lux@center			
5600K	3397LUX	1022LUX	516LUX
3200K	3302LUX	926LUX	442LUX

Item型号 参数Specification	CSKS60-1	CSKS60-2	CSKS120-1	CSKS120-2
输入电压 Power Input	AC100~240V, 50/60Hz or DC24V/5A		AC100~240V, 50/60Hz or DC24V/10A	
光源 Light Source	SMD LED			
功率 Power Consumption	100W		200W	
显色指数 CRI	95±3			
色温 Color Temperature	CW5600K or WW3200K	CW5600K ~ WW3200K	CW5600K or WW3200K	CW5600K ~ WW3200K
流明 Lumen Output	≥10080Lumen		≥20160Lumen	
照射角度 Lens Degree	120°			
调光方式 Control Protocol	DMX512/主从调光/数码调光 DMX512/Master Dimmer / Digital Dimming			
频率 Refreshing Frequency	21000Hz			
防护等级 Protection class	IP21			
尺寸 Dimension	610X350X104mm		1195X350X104mm	
重量 Weight	7.3KG		12.2KG	

LED高清数码柔光灯(远程钻石柔光面板)

LED HIGH-DEFINITION DIGITAL LAMBENCY LIGHT

(Remote Diamond Diffusion Panel)

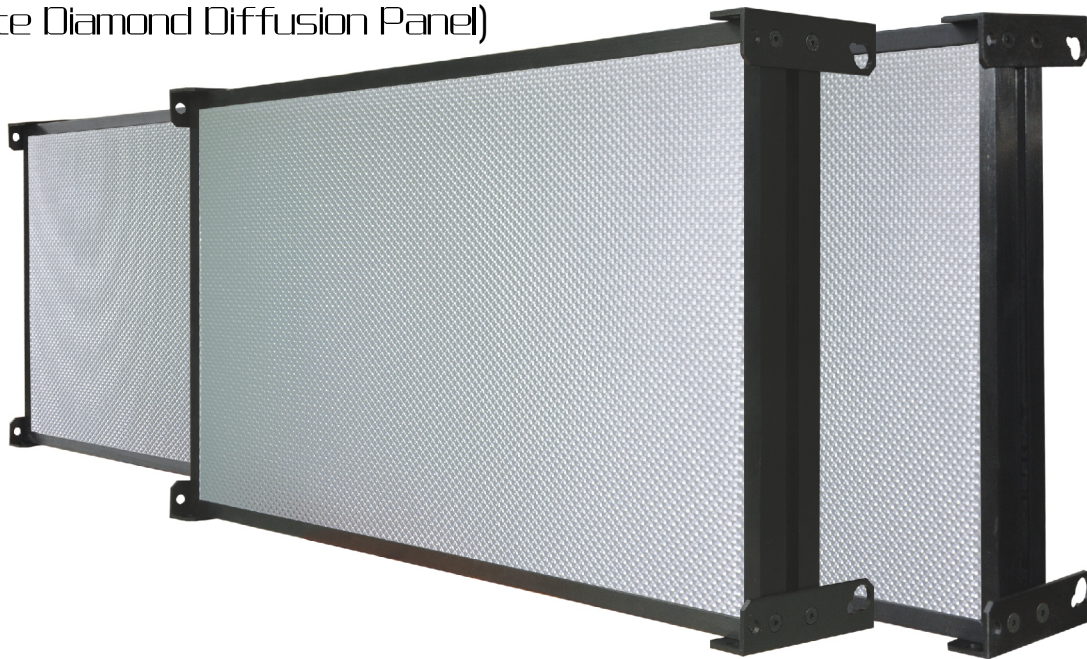

CSKSR60-1 CSKSR60-2
CSKSR120-1 CSKSR120-2



凯士光电经过多年LED技术研发，全新的巅峰杰作——凯士LED高清数码柔光灯上市，该系列柔光灯为紧凑型、超轻、超亮的高品质LED柔光灯，设计上注重外形、材料、光箱光路、光效、功率、交直流电源及使用体验多种因素，将为行业树立新的标准。针对不同的用户我们对产品分成：柔光面板和远程钻石柔光面板。柔光面板将为拍电影电视和外拍的用户，提供便携耐用、灵活组合的优质LED柔光光源；远程钻石柔光面板将为广电行业、静态摄影和室内照明的用户，提供耐用、灵活多变，强悍高亮度的优质LED柔光光源。目前上市产品尺寸为60cm（2英尺）和120cm（4英尺）的两种尺寸，产品可简易拼接；并带易装蜂窝或易装遮菲，可选中央支架（魔术腿）或U形支架；色温为3200K、5600K和双色温3200K~5600K三种，色彩还原优异可调，光效真正柔和均匀；航空铝合金材料核心构架，使得产品轻便坚固，抗震耐摔，经久耐用，经得起用户高负荷的使用。经过别具匠心的设计及生产一款高品质的专业灯具便呈现在你面前。

After years' of research and develop, CARSU's brand-new masterpiece, LED high-definition digital lambency light is on market now. With compact, ultra-light, ultra-bright and high quality, this series LED light will set up new standards, by laying emphasis on the design of the shape, material, illuminance, power, AC/DC power and usage experience, etc.



According to different users, the lights are divided into soft diffusion panel and remote diamond diffusion panel.

Soft diffusion panel are suitable for film tv and outdoor shooting, by providing portable, combining flexibly high-end LED soft lighting;

Remote diamond diffusion panel are suitable for broadcast industry, portrait photography and indoor shooting, by providing durable, flexible, and super-bright high-end LED soft lighting.

At present, the available two dimensions are 60cm (2 feet) and 120cm (4 feet), which can joinable easily; with louver or barndoors, central bracket (magic arm) or U-type bracket is available. 3200K, 5600K, bi-color 3200K-5600K are for choice; high CRI; even soft light output; Using aviation aluminum alloy core frame material makes the light light-weighted and solid, strong and durable, over-load usage affordable;


At last, a high-end professional LED light with ingenious design is present in front of you.

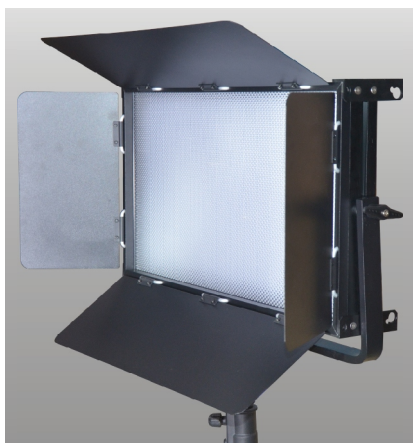


中央旋转支架(魔术腿) 选配件
Central Bracket (magic arm)



U 形支架 随灯附送
U-type Bracket included



易装蜂窝 选配件
Louver



易装遮菲 随灯附送
Barndoors included

LED高清数码柔光灯(远程鑽石柔光面板)的对应距离照度
Corresponding illumination of LED HIGH-DEFINITION DIGITAL LAMBENCY LIGHT
(Remote Diamond Diffusion Panel) to different distances

CSKSR60-1 CSKSR60-2

距离 Distance	1m	2m	3m
照度 Lux@center			
5600K	3333LUX	848LUX	405LUX
3200K	2810LUX	773LUX	379LUX

CSKSR120-1 CSKSR120-2

距离 Distance	1m	2m	3m
照度 Lux@center			
5600K	5185LUX	1663LUX	779LUX
3200K	5142LUX	1405LUX	689LUX

参数Specification	Ltem型号	CSKSR60-1	CSKSR60-2	CSKSR120-1	CSKSR120-2
输入电压 Power Input		AC100~240V, 50/60Hz or DC24V/5A		AC100~240V, 50/60Hz or DC24V/10A	
光源 Light Source		SMD LED			
功率 Power Consumption		100W		200W	
显色指数 CRI		95±3			
色温 Color Temperature		CW5600K or WW3200K	CW5600K ~ WW3200K	CW5600K or WW3200K	CW5600K ~ WW3200K
流明 Lumen Output		≥10080Lumen		≥20160Lumen	
照射角度 Lens Degree		120°			
调光方式 Control Protocol		DMX512/主从调光/数码调光 DMX512/Master Dimmer / Digital Dimming			
频率 Refreshing Frequency		21000Hz			
防护等级 Protection class		IP21			
尺寸 Dimension		610X350X104mm		1195X350X104mm	
重量 Weight		8.6KG		14.5KG	



LED高显指数码聚光灯

LED HIGH-CRI FRESNEL SPOTLIGHT

carsu® 凯士
Professional LED Optoelectronics

凯士光电科技

地址：中国广东省汕头市龙湖区龙湖专利园 4 楼

tel: +86-75488800235

fax: +86-75487269142

<http://www.carsuled.net>

ZIP: 515041

E-mail: 401645508@qq.com

Q Q: 401645508

MSN: carsuled@hotmail.com

Skype: carsuled

经销商：

Distributor: