

LEDGO

LEDGO TECHNOLOGY LIMITED



Tel: +86-754-85354187

Fax: +86-754-85300887

Website: www.ledgo.hk

Email: info@ledgo.hk, sales@ledgo.hk

Contact: Zhanglin 324 Dongli Chenghai Shantou City Guangdong China

20160520

2016 Catalogue





LEDGO, More Than a Light!

LEDGO

CONTENTS ■

LED Fresnel Light	1-10
Professional LED Studio Light	11-20
Value LED Studio Light	21-22
Ultra-matte LED Studio Light	23-26
Professional Green Screen Studio Kit	27-30
Versatile LED Light	31-32
Portable LED Light	33-34
On Camera LED Light	35-36
LED Ring Light	37-40
LED Pad Light	41-42
Portable Cases	43-44
Accessories	45-48

LED Fresnel Light

CRI:95

High efficiency moulded LED lamp

Low power consumption

Silent running with passive air cooling

flicker free, 0-100% stepless adjustable brightness control

Beam angle is adjustable

Wifi,2.4G remote,DMX and manual

dimmer control



LG-D1200M

CRI(Ra): 95

Power: 120W

Power Source: out put-24V in put-85-264V

Color Temperature: 5600K

Illumination(LM): 7980LM


Illumination(LUX): Spot 9° : 53979 LUX@1M;

Flood 46° :10256 LUX@1M;


Brightness Control: Wifi,2.4G,DMX and Dimmer

Dimension: 390*230*190MM

Weight: About 5.2KG

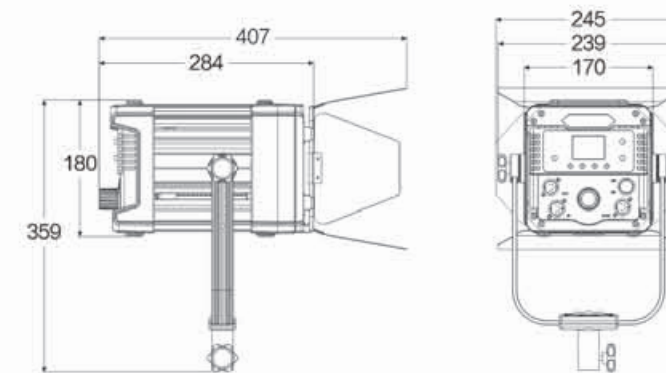

LEDGO RA:95

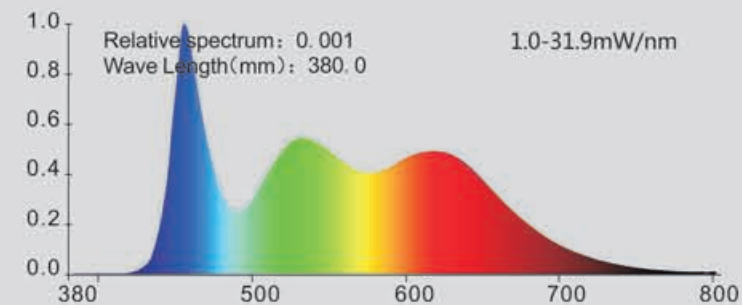


CCT=D5770(-0.7)
TLCL-2012:96(D770)



EBU:TLCl-2012
NBK-Oc

Sector	Lightness	Chroma	Hue
R	0	0	0
R/Y	0	0	0
Y	0	0	0
Y/G	0	0	0
G	0	0	0
G/C	0	0	0
C	0	0	0
C/B	0	0	0
B	0	0	0
B/R	0	0	0
M	0	0	0
M/R	0	0	0



The new highly-efficient 5600K LED Fresnel light from LEDGO gives you incredible flexibility.

It's a spot light in one scenario, a flood light in the other. Built to take a beating. And because

it's from LEDGO you know you're going to get great value and reliability!

Available in 30,60,120,300 and 450 watt versions.



LG-D300

CRI(Ra): 95
Power: 30W
Power Source: out put-15V in put-85-264V
Color Temperature: 5600K
Illumination(LM): 2100LM
Illumination(LUX): Spot10° : 9843 lux@1M;
flood 30° :2307 lux@1M;
Brightness Control: Wifi,2.4G and Dimmer
Dimension: 160*260*135MM
Weight: About 2.5KG

LG-D600

CRI(Ra): 95
Power: 60W
Power Source: out put-15V in put-85-264V
Color Temperature: 5600K
Illumination(LM): 3990LM
Illumination(LUX): Spot10° : 23553 LUX @1M;
Flood 30° :6590 LUX @1M;
Brightness Control: Wifi,2.4G and Dimmer
Dimension: 170*280*145MM
Weight: About 3.1KG

LG-D1200

CRI(Ra): 95
Power: 120W
Power Source: out put-24V in put-85-264V
Color Temperature: 5600K
Illumination(LM): 7980LM
Illumination(LUX): Spot 9° : 53979 LUX@1M;
Flood 46° :10256 LUX@1M;
Brightness Control: Wifi,2.4G and Dimmer
Dimension: 390*230*190MM
Weight: About 5.2KG

Wifi,2.4G remote,DMX and manual dimmer control;

Low power consumption;

Silent running with passive air cooling;



Wifi,2.4G remote,DMX and manual dimmer control;

LG-D3000M

CRI(Ra): 95
Power: 300W
Power Source: out put-54V in put-90-305V
Color Temperature: 5600K
Illumination(LM): 17100LM
Illumination(LUX): Spot 8° : 74354 LUX@1M;
Flood 30° :25750 LUX@1M;
Brightness Control: Wifi,2.4G,DMX and Dimmer
Dimension: 565*440*341mm
Weight: About 15.7KG

LG-D4500M

CRI(Ra): 95
Power: 450W
Power Source: out put-54V in put-90-305V
Color Temperature: 5600K
Illumination(LM): 24300LM
Illumination(LUX): Spot 10° : 138554 LUX@1M;
Flood 44° :27535 LUX @1M;
Brightness Control: Wifi,2.4G,DMX and Dimmer
Dimension: 610*490*371MM
Weight: About 20KG

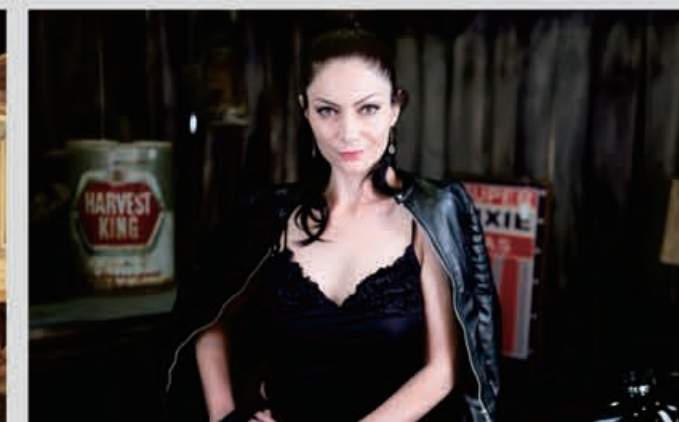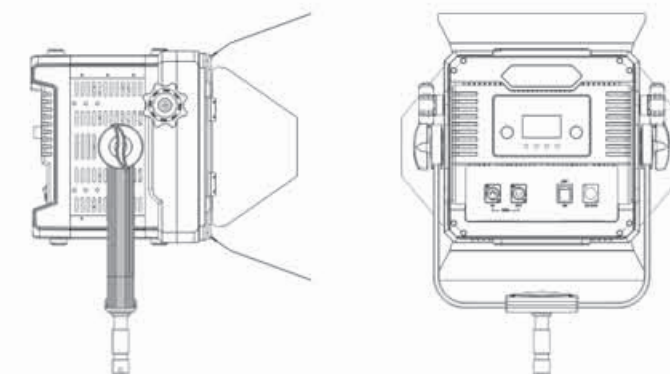

LG-D1200MC

CRI(Ra): 95
Power: 120W
Power Source: out put-24V in put-85-264V
Color Temperature: 3200K-5600K
Illumination(LM): 8400LM
Illumination(LUX): 5600K/Spot 9° : 53979 lux@1M;
5600K/Flood 46° : 10256 lux@1M;
Illumination(LUX): 3200K/Spot 9° : 51280 lux@1M;
3200K/Flood 46° : 9743 lux@1M;
Brightness Control: Wifi, 2.4G and Dimmer
Dimension: 390*230*190MM
Weight: About 5.2KG

LG-D600C

CRI(Ra): 95
Power: 60W
Power Source: out put-15V in put-85-264V
Color Temperature: 3200K-5600K
Illumination(LM): 3910LM
Illumination(LUX): 5600K/Spot 10° : 23553 LUX @1M;
5600K/ Flood 30° : 6590 LUX @1M;
Illumination(LUX): 3200K/Spot 10° : 23081 LUX @1M;
3200K/Flood 30° : 6458 LUX @1M;
Brightness Control: Wifi, 2.4G and Dimmer
Dimension: 170*280*145MM
Weight: About 3.1KG

Optional Accessories for D1200M/D1200



Configuration



Optional Accessories for D600



Configuration



3200K

4800K

5600K

On Camera LED Fresnel Light

KEY FEATURES

High CRI;
Focusing: from 10° - 60° stepless control;
Low power consumption, high brightness;
Flicker free, 0-100% brightness stepless adjustable.

LG-24F

CRI(Ra): 95
Power: 8W
Power Source: 7.2-12V DC, 100-240VAC
Color Temperature: 5600K
Illumination(LM): 560LM
Illumination(LUX): Spot : 1920lux; Flood: 465lux;
Brightness Control: Stepless adjustment from 0% to 100%
Dimension: 165*530*450MM
Weight: About 0.3KG

LEDGO



Technical parameters

Model No.	Power	Color Temperature	Illumination (LM)	Illumination(LUX)						CRI(Ra)	R9	R15
				angle	1M	2M	3M	4M	5M			
LG-D4500M	450W	5600K	27000LM	spot 10°	138554	33213	14759	8181	5314	97		
				flood 44°	27535	7079	3243	1916	1280			
LG-D3000M	300W	5600K	18000LM	spot 8°	74354	24621	11354	6556	4340	97.3	90	95
				flood 30°	25750	7420	3470	2007	1320			
				flood 46°	18327	4724	2185	1273	855			
LG-D1200M	120W	5600K	8400LM	spot 9°	53979	12023	5117	2852	1835	95	90	94
				flood 46°	10256	2789	1245	730	482			
LG-D1200	120W	5600K	8400LM	spot 9°	53979	12023	5117	2852	1835	95	90	94
				flood 30°	11810	3244	1466	835	546			
				flood 46°	10256	2789	1245	730	482			
LG-D600C	60W	3200K-5600K	4116LM	spot 10°	23082	5876	2416	1345	851	96	94	94
				flood 30°	6458	1772	797	457	299			
				flood 38°	10051	2733	1220	715	472			
LG-D600	60W	5600K	4200LM	spot 10°	23553	5996	2465	1372	868	96	94	94
				flood 30°	6590	1808	813	466	305			
				flood 38°	10256	2789	1245	730	482			
LG-D300	30W	5600K	2100LM	spot 9°	9843	2474	1087	808	388	97.5	94	96
				flood 40°	2307	640	272	155	101			
LG-24F	8W	5600K	560LM	spot	1920	500	220	130	80	95.9	94	94
				flood	465	120	54	31	20			



- Low power consumption
- Silent running with passive air cooling
- Flicker free, 0-100% stepless adjustable brightness control
- Beam angle is adjustable
- Wifi, 2.4G remote, DMX and manual dimmer control

Adjust your LEDGO lights remotely!
Wirelessly control brightness and colour temperature.



This fixture is controllable from your Android or iOS device via the LEDGO WiFi Remote App, in combination with the optional LEDGO WiFi Control box. According to request of the lighting scene, set and save the different lighting scene, and easily return to the needed application scene when required.



LEDGO

LED Studio Light

Professional Series

Shot by Frank Doorhof



LED Studio Light

Professional Series

The new model LG-600MSII/MCSII is a revolutionary range from LG-600MS/MCS, which has improved color rendition(CRI up to 95), optimum color quality, high light output, low consumption, can be used with lighting console, suitable for using on-site shooting and field studio setup.




LG-600MSII

- CRI(Ra): 95
- Power: 36W
- Power Source: 15V DC, 100-240V AC, Sony V-lock battery
- Color Temperature: 3200K/5600K
- Illumination(LM): 4560LM
- Illumination(LUX): 6110LUX@1M
- Brightness Control: Wifi,2.4G,DMX and Dimmer
- Dimension: 450*400*85MM
- Weight: About 4KG

LG-600MCSII

- CRI(Ra): 95
- Power: 36W
- Power Source: 15V DC, 100-240V AC, Sony V-lock battery
- Color Temperature: 3200K-5600K
- Illumination(LM): 4512LM
- Illumination(LUX): 6087LUX@1M
- Brightness Control: Wifi,2.4G,DMX and Dimmer
- Dimension: 450*400*85MM
- Weight: About 4KG

LEDGO

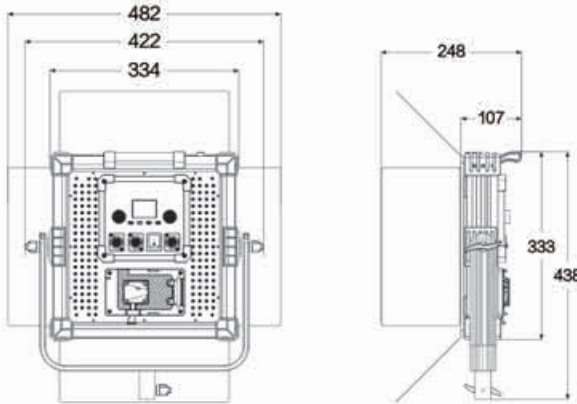



LG-900MSII

CRI(Ra): 95
 Power: 54W
 Power Source: 15V DC, 100-240V AC, Sony V-lock battery
 Color Temperature: 3200K/5600K
 Illumination(LM): 6768LM
 Illumination(LUX): 9712LUX@1M
 Brightness Control: Wifi, 2.4G, DMX and Dimmer
 Dimension: 450*455*85MM
 Weight: About 4KG

LG-900MCSII

CRI(Ra): 95
 Power: 54W
 Power Source: 15V DC, 100-240V AC, Sony V-lock battery
 Color Temperature: 3200K-5600K
 Illumination(LM): 6930LM
 Illumination(LUX): 10667LUX@1M
 Brightness Control: Wifi, 2.4G, DMX and Dimmer
 Dimension: 450*455*85MM
 Weight: About 4KG



LG-1200MSII


CRI(Ra): 95
 Power: 72W
 Power Source: 15V DC, 100-240V AC, Sony V-lock battery
 Color Temperature: 3200K/5600K
 Illumination(LM): 9120LM
 Illumination(LUX): 11786LUX@1M
 Brightness Control: Wifi, 2.4G, DMX and Dimmer
 Dimension: 510*450*85MM
 Weight: About 5KG

LG-1200MCSII


CRI(Ra): 95
 Power: 72W
 Power Source: 15V DC, 100-240V AC, Sony V-lock battery
 Color Temperature: 3200K-5600K
 Illumination(LM): 9216LM
 Illumination(LUX): 11798LUX@1M
 Brightness Control: Wifi, 2.4G, DMX and Dimmer
 Dimension: 510*450*85MM
 Weight: About 5KG

The new models LG-900MSII/MCSII is a revolutionary range from LG-900MS/MCS, and LG-1200MSII/MCSII is a revolutionary range from LG-1200MS/MCS, which have improved color rendition(CRI up to 95), optimum color quality, high light output, low consumption, can be used with lighting console, suitable for using on-site shooting and field studio setup.

LEDGO RA:95

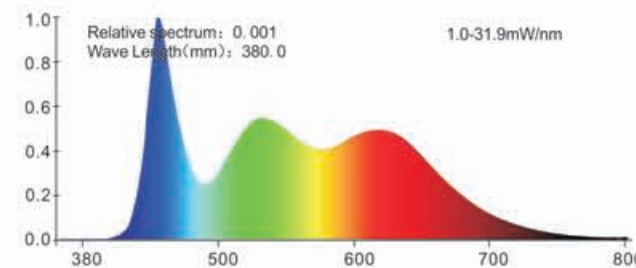

Other RA:85

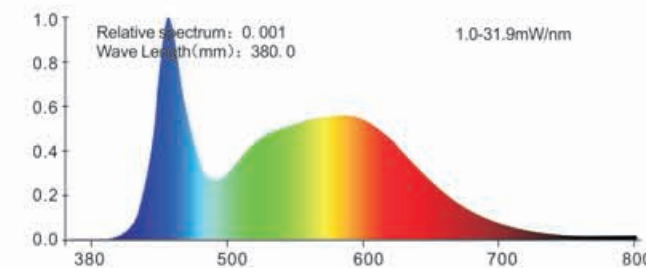

ACCESSORIES:



Honeycomb Grid



2.4G Remote Controller



Wifi-2.4G Control Box

CONFIGURATION:



Barndoor



Adapter+Cord



CN-6V Adapter Holder

LG-1200MS/MCS Series LED panel 1200 is a 72W rectangular panel can be softened with the included soft light diffuser. The light output of the panel can be adjusted manually with the knob, or controlled by lighting console, suitable for using on-site shooting and field studio setup.



LG-1200MS

CRI(Ra): 95
 Power: 72W
 Power Source: 14-16.8V DC, 100-240V AC, Sony V-lock battery
 Color Temperature: 3200K/5600K
 Illumination(LM): 9360LM
 Illumination(LUX): 10975LUX@1M
 Brightness Control: DMX and Dimmer
 Dimension: 465*393*85MM
 Weight: About 3KG



LG-1200MCS

CRI(Ra): 95
 Power: 72W
 Power Source: 14-16.8V DC, 100-240V AC, Sony V-lock battery
 Color Temperature: 3200K-5600K
 Illumination(LM): 9240LM
 Illumination(LUX): 10410LUX@1M
 Brightness Control: DMX and Dimmer
 Dimension: 465*393*85MM
 Weight: About 3KG



HIGH CRI
 HIGH BRIGHTNESS



LG-600MS

CRI(Ra): 95
 Power: 36W
 Power Source: 14-16.8V DC, 100-240V AC,
 Sony V-lock battery
 Color Temperature: 3200K/5600K
 Illumination(LM): 4320LM
 Illumination(LUX): 5658LUX@1M
 Brightness Control: DMX and Dimmer
 Dimension: 380*365*80MM
 Weight: About 2KG



LG-600MCS

CRI(Ra): 95
 Power: 36W
 Power Source: 14-16.8V DC, 100-240V AC,
 Sony V-lock battery
 Color Temperature: 3200K-5600K
 Illumination(LM): 4620LM
 Illumination(LUX): 5915LUX@1M
 Brightness Control: DMX and Dimmer
 Dimension: 380*365*80MM
 Weight: About 2KG



LG-900MS

CRI(Ra): 95
 Power: 54W
 Power Source: 14-16.8V DC, 100-240V AC,
 Sony V-lock battery
 Color Temperature: 3200K/5600K
 Illumination(LM): 6480LM
 Illumination(LUX): 8595LUX@1M
 Brightness Control: DMX and Dimmer
 Dimension: 410*380*85MM
 Weight: About 3KG



LED Studio Light

Value Series

LEDGO Value Series Bi-color LED Panel 900 is 54W square light panel that allows you to fine tune the color of your light anywhere from 3200K to 5600K and generates 6930LM producing 8900Lux at 1 meter.



LG-900CSC

CRI(Ra): 95
Power: 54W
Power Source: 12-16.8V DC, 100-240V AC, Sony V-lock battery
Color Temperature: 3200K-5600K
Illumination(LM): 6930LM
Illumination(LUX): 8900 LUX@1M
Brightness Control: Wifi, 2.4G and Dimmer
Dimension: 450*60*380MM
Weight: About 2KG



LG-600SC

CRI(Ra): 95
Power: 36W
Power Source: 12-16.8V DC, 100-240V AC, Sony V-lock battery
Color Temperature: 3200K/5600K
Illumination(LM): 4320LM
Illumination(LUX): 5658LUX@1M
Brightness Control: Wifi, 2.4G and Dimmer
Dimension: 340*73*380MM
Weight: About 2KG



LG-600CSC

CRI(Ra): 95
Power: 36W
Power Source: 12-16.8V DC, 100-240V AC, Sony V-lock battery
Color Temperature: 3200K-5600K
Illumination(LM): 4620LM
Illumination(LUX): 5915LUX@1M
Brightness Control: Wifi, 2.4G and Dimmer
Dimension: 340*73*380MM
Weight: About 2KG



LG-900SC

CRI(Ra): 95
Power: 54W
Power Source: 12-16.8V DC, 100-240V AC, Sony V-lock battery
Color Temperature: 3200K/5600K
Illumination(LM): 6480LM
Illumination(LUX): 8595LUX@1M
Brightness Control: Wifi, 2.4G and Dimmer
Dimension: 450*60*380MM
Weight: About 2KG

LEDGO



LEDGO



LED Studio Light

Ultrathin · Ultra soft



LEDGO's innovation LED panel light LG-T1440/LMC is a soft, cool LED panel, bi-color 3200K to 5600K, flicker free, perfect for studio, controlled by DMX, WIFI, or iphone APP. The thicknedss of panel light is just 27mm, which can be mounted to light stands and placed horizontally or vertically.




LG-T1440LMC


CRI(Ra): 95
 Power: 144W
 Power Source: 24V DC
 Color Temperature: 3200K-5600K
 Illumination(LM): 11628LM
 Illumination(LUX): 5600K: 2170LUX@1M, 3200K: 2229LUX@1M;
 Brightness Control: Wifi,2.4G,DMX and Dimmer
 Dimension: 710*330*27MM
 Weight: About 5.5KG

LG-T2880LMC

CRI(Ra): 95
 Power: 288W
 Power Source: 24V DC
 Color Temperature: 3200K-5600K
 Illumination(LM): 23256LM
 Illumination(LUX): 5600K: 4372LUX@1M, 3200K:4053LUX@1M;
 Brightness Control: Wifi,2.4G,DMX and Dimmer
 Dimension: 1375*330*27MM
 Weight: About 11KG

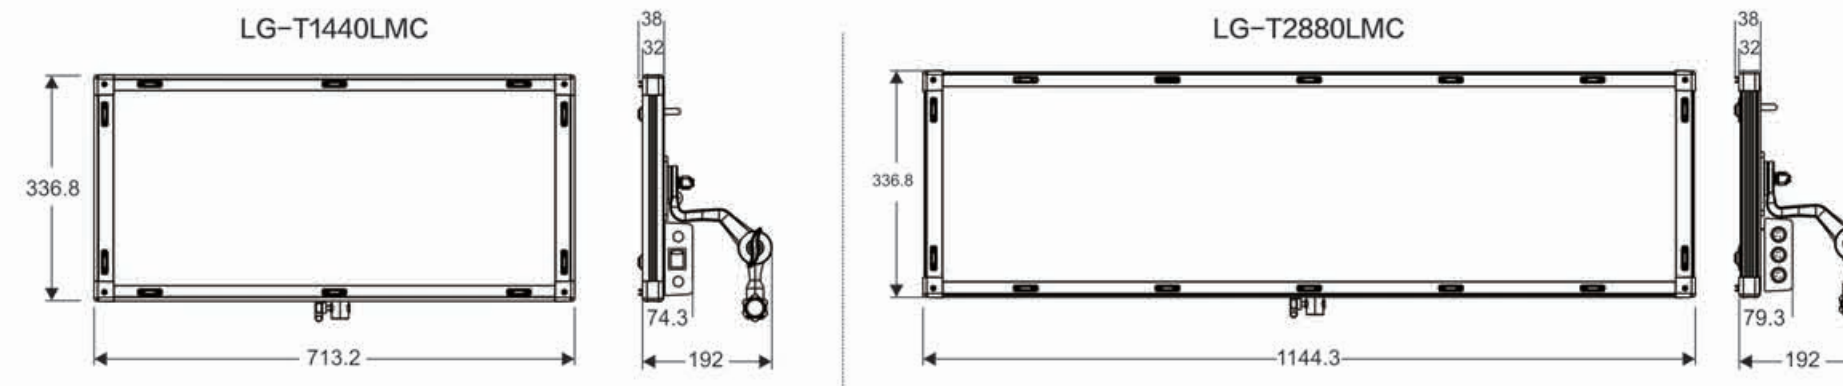

ACCESSORIES:

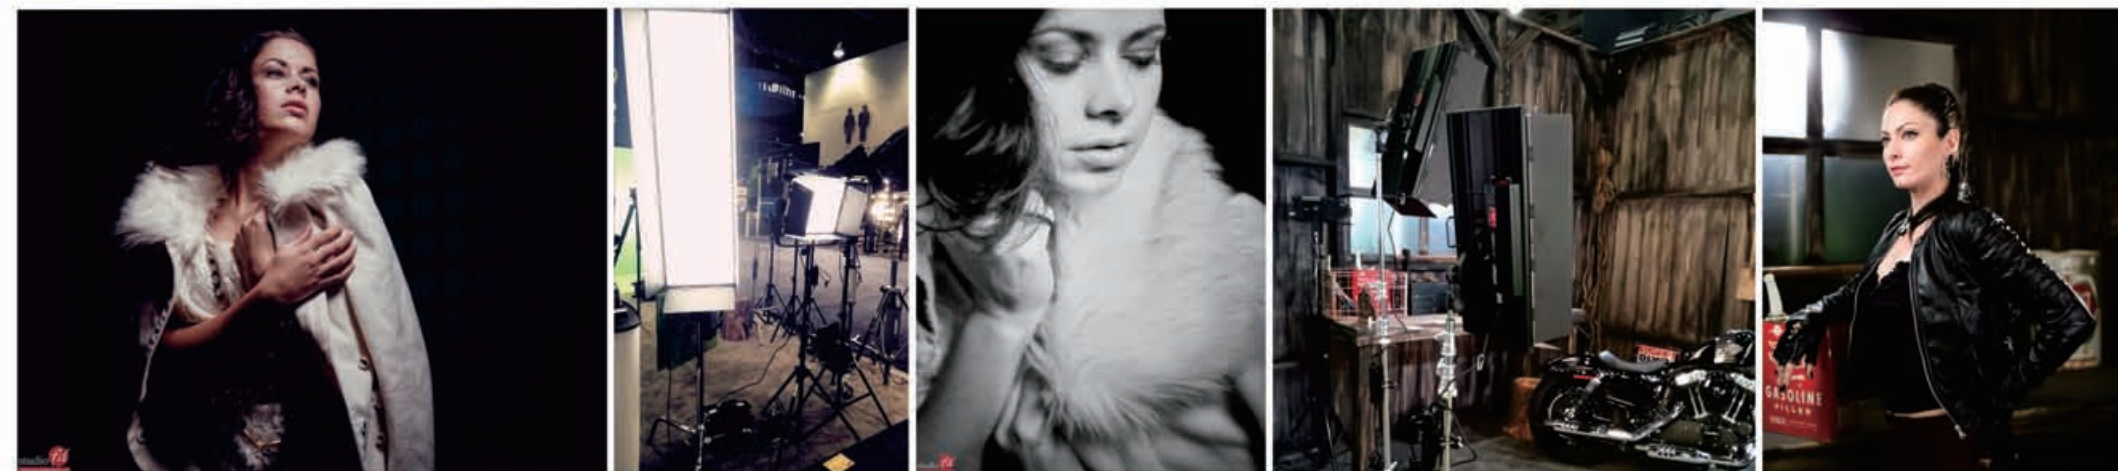

LEDGO

Professional Green Screen Studio Kit



- 1.Miraculous multi-purpose backdrop;
- 2.Set up in minutes straight from the bag;
- 3.Lightweight ,compact and portable;
- 4.Includes carrying bag.

LG-E60

LG-E60

CRI(Ra): 95

Power: 12W

Power Source: 15V DC/100-240V AC; 18650 Battery

Color Temperature: 5600K

Illumination(LM): 969LM

Illumination(LUX): 300LUX@1M

Brightness Control: Cable dimmer control

Dimension: 600*65*55MM

Weight: About 0.5KG

LG-E90

CRI(Ra): 95

Power: 18W

Power Source: 15V DC/100-240V AC; 18650 Battery

Color Temperature: 5600K


Illumination(LM): 1453.5LM

Illumination(LUX): 410LUX@1M

Brightness Control: Cable dimmer control

Dimension: 900*65*55MM

Weight: About 0.8KG

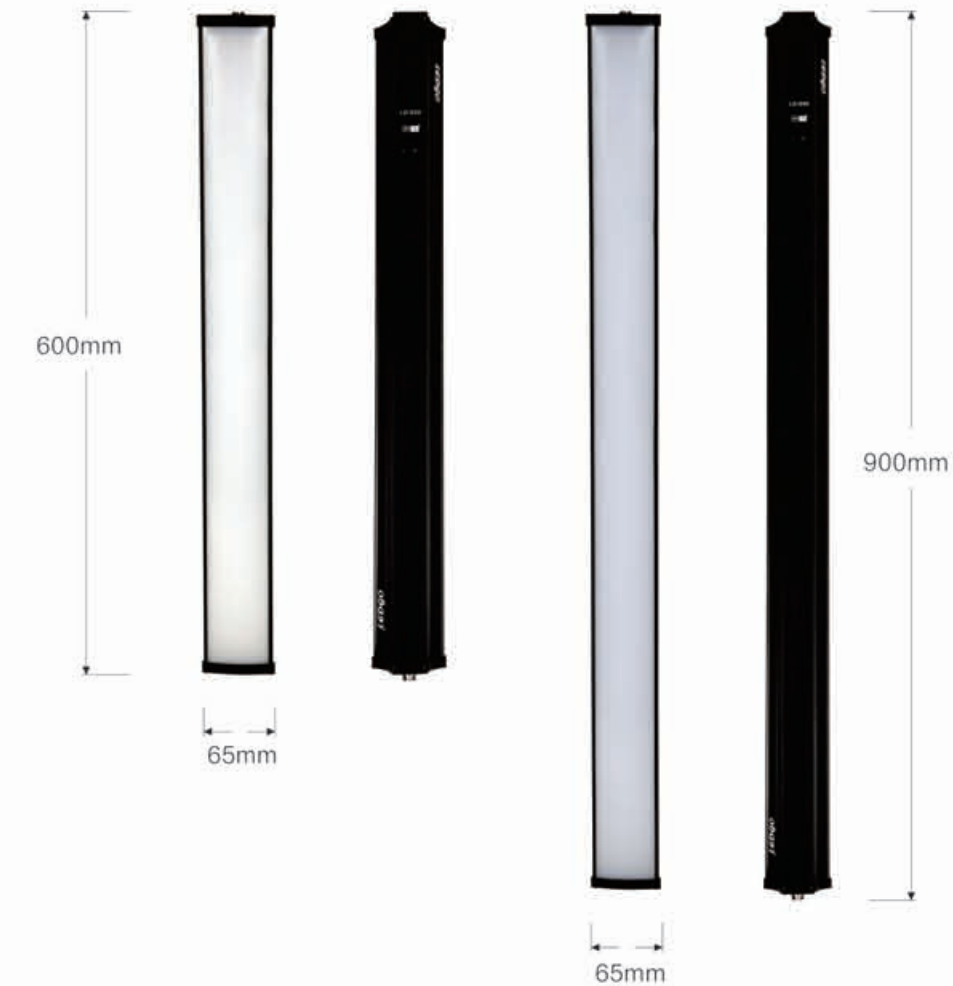

INSTALLATION:



LG-E60 4Kit

4 – LEDGO 60 LED Green Screen Strip Light
2 – AC Power Adapters
2 – T2 Connectors
2 – Light Stands
1 – Nylon Carry Case

LG-E90 4Kit

4 – LEDGO 90 LED Green Screen Strip Light
2 – AC Power Adapters
2 – T2 Connectors
2 – Light Stands
1 – Nylon Carry Case

LG-1822U U-Frame Green Screen Kit

1 – Aluminum U-Shaped Green Screen Frame
1 – Chroma Green Background Cloth
1 – Nylon Carry Case

LG-2022L L-Frame Green Screen Kit

1 – Aluminum L-Shaped Green Screen Frame
1 – Chroma Green Background Cloth
1 – Nylon Carry Case

LG-E60 could be a kit for your multiple choice, available in 2kit, 4kit, 8 kit versions.



LEDGO chromakey studio kit is made up by green screen and LED strip lights. Lights' power can be supplied by battery or power adapter, only need to provide power to one light, all connected lights can be bright.




Green screen can be set up in minutes, which is a miraculous multi-purpose backup.



LEDGO



versatile
Bi-color. Wifi APP control



studio *fit*
www.studiofit.com

LG-V58C2K1 · LG-V58C2K2

CRI(Ra): 95

Power: 28.8*2W

Power Source: 15V DC, Sony V-lock Battery, Sony NP-F750/970 Battery.

Color Temperature: 3200K-5600K


Illumination(LM): 3414LM

Brightness Control: Wifi, 2.4G and Dimmer

Dimension: 1000*350*20mm(LG-V58C2K1)

580*580*20mm (LG-V58C2K2)

Weight: About 5.2KG

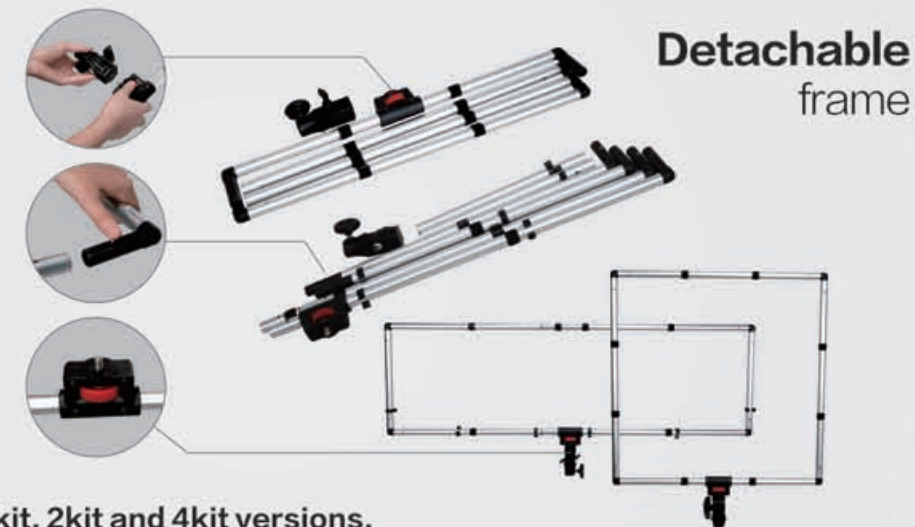

Detachable
frame


LG-V58C could be a kit for your multiple choice, available in 1kit, 2kit and 4kit versions.

LG-V58C1K1 1pcs of versatile LED Tiles with rectangle frame and power controller

LG-V58C2K1 2pcs of versatile LED Tiles with rectangle frame and power controller

LG-V58C2K2 2pcs of versatile LED Tiles with square frame and power controller

LG-V58C4K1 4pcs of versatile LED Tiles with rectangle frame and power controller




Waterproof

The best choice for rainy day shooting



Foldable and arbitrary curved

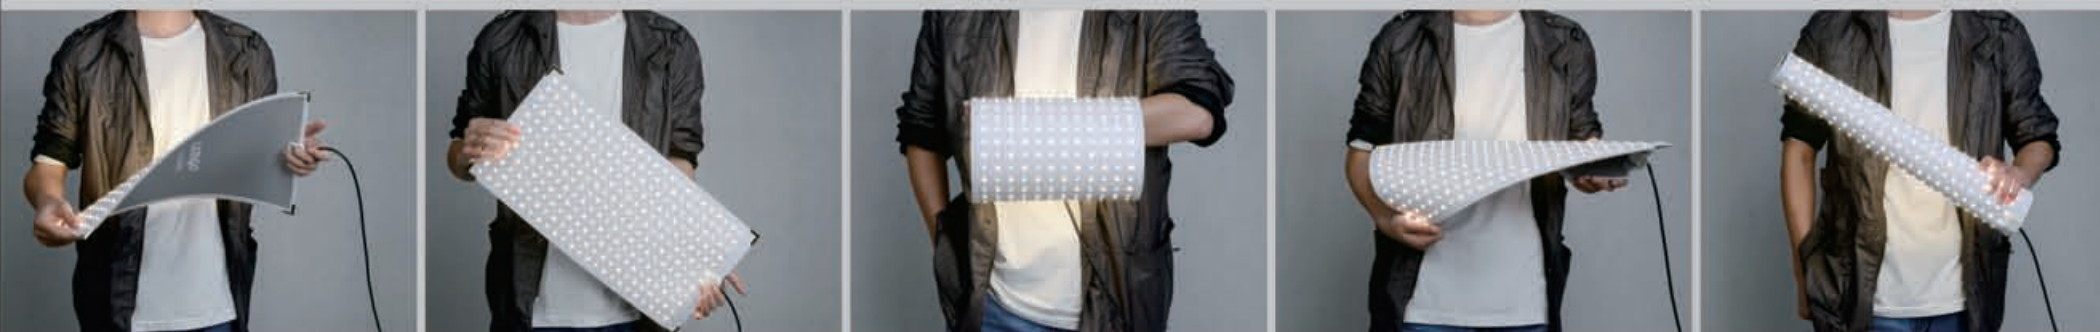




Shot by Frank Doorhof

Portable LED Video Light

1. Portable design, ideal for movable studio.
2. Multiple ways to mount: nut 1/4 in-mount, handle mount and tripod-mount.
3. Use 7.4V battery or 7-12V DC input power, easy & affordable way for power.
4. Build-up itself design, easy and simple to get big light.
5. The dimmer allows you to lower the power to provide a fill.

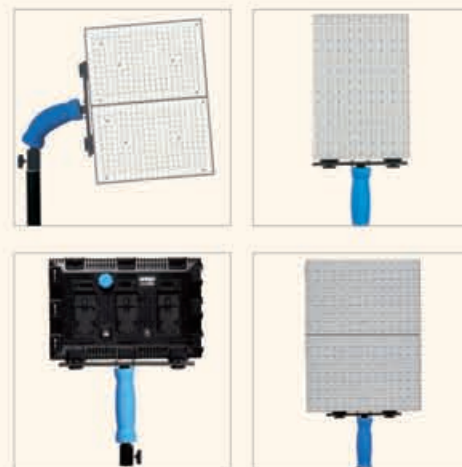

LG-B560

CRI(Ra): 95
Power: 33.6W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 5600K
Illumination(LM): 4150LM
Illumination(LUX): 4300@1M
Brightness Control: Dimmer
Dimension: 280*180*48MM
Weight: About 1KG



LG-B560 3KIT+T

Contents:
03* LG-B560 portable LED light
03* Handle
03* Power adapter and cord
06* Battery box for 6pcs AA batteries
06* Adapter for Panasonic batteries
03* Filter set
01* Carrying bag
03* NG-L216 light stand
Total power: 100.8W

LG-B308

CRI(Ra): 95
Power: 18.5W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 5600K
Illumination(LM): 2285LM
Illumination(LUX): 11392@0.5M
Brightness Control: Dimmer
Dimension: 209*59*140MM
Weight: About 0.6KG

LG-B560C

CRI(Ra): 95
Power: 33.6W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 3200K-5600K
Illumination(LM): 3945LM
Illumination(LUX): 3110@1M
Brightness Control: Dimmer
Dimension: 280*180*48MM
Weight: About 1KG



LG-B560C 3KIT+T

Contents:
03* LG-B560C portable LED light
03* Handle
03* Power adapter and cord
06* Battery box for 6pcs AA batteries
06* Adapter for Panasonic batteries
03* Filter set
01* Carrying bag
03* NG-L216 light stand
Total power: 100.8W

LG-B308C

CRI(Ra): 95
Power: 18.5W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 3200K-5600K
Illumination(LM): 2427LM
Illumination(LUX): 12221@0.5M
Brightness Control: Dimmer
Dimension: 209*59*140MM
Weight: About 0.6KG

On Camera LED Light

The LEDGO line of On-Camera LED Panels has raised the bar for portable location lighting. With a 90+ CRI rating, unparalleled light output and an interlocking modular design, LEDGO On-Camera LED's allow you to customize your light source to fit your needs. The 9W LED On Camera Light, each head kit combines four of our 9W LED On Camera Lights to give you a wide range of lighting options. Take advantage of the modular design to create a single light source of 4,680 Lumens, or use them as four different light sources to add depth and dimension to your shots. The 4 head kit gives you the versatility to create a very diverse range of lighting effects.



Shot by Frank Doorhof

LG-B150

CRI(Ra): 95
Power: 12.9W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 5600K
Illumination(LM): 1593LM
Illumination(LUX): 7007@0.5M
Brightness Control: Dimmer
Dimension: 143*44*95MM
Weight: About 0.2KG



LG-B160C

CRI(Ra): 95
Power: 9.6W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 3200K-5600K
Illumination(LM): 1186LM
Illumination(LUX): 6662@0.5M
Brightness Control: Dimmer
Dimension: 152*50*101MM
Weight: About 0.3KG



LG-B56

CRI(Ra): 95
Power: 3.4W
Power Source: 3-1.5V DC, AA Battery
Color Temperature: 5600K
Illumination(LM): 420LM
Illumination(LUX): 1372@0.5M
Brightness Control: Dimmer
Dimension: 83*69*38MM
Weight: About 0.1KG



LG-B150 4KIT

Contents:
04*LG-B150 LED light
01*Handle
02*Battery adapter
02*Battery box for 6pcs AA batteries
01*Carrying bag
04*Filter set
01*Fourplug adapter cable
01*9V5A power adapter
Total power:36W



LG-B160C 4KIT

Contents:
04*LG-B160C LED light
01*Handle
02*Battery adapter
02*Battery box for 6pcs AA batteries
01*Carrying bag
04*Filter set
Total power:38.4W



LG-B168S

CRI(Ra): 95
Power: 10W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 5600K
Illumination(LM): 1235LM
Illumination(LUX): 5970@0.5M
Brightness Control: Dimmer
Dimension: 245*45*75MM
Weight: About 0.3KG



LEDGO



Ultra Soft
LED Ring Light

LG-R320C , ultra soft LED ring light, beauty eyes light . Bi-color and brightness adjustable .
Part of unit handle at side of the light, can use Sony NP battery to supply the power .
Easy to mount with camera and shot anywhere .



LG-R320C

CRI(Ra): 95
Power: 32W
Power Source: 15V DC , Sony NP-F750/970 Battery
Color Temperature: 3200K-5600K
Illumination(LM): 2193LM
Illumination(LUX): 545@1M
Brightness Control: Wifi,2.4G and Dimmer
Dimension: 305MM in-diameter, 465MM out-diameter
Weight: About 1.9KG




Feature:

Two dimmers design, can control brightness of two sides separately, supply full ring same light effect or left-right contrastive light effect.


The LG-R332 LED Video Lighting features the cool, correct daylight balanced and high CRI LED light that faces professional videographer's latest demands on lighting solution. The LG-R332 continues the unique designs of Non-frame and transparent honey comb cover as front light guide board. It can be either used with DSLR RIG or put on the hot shoe adapter as an on camera LED light.

LG-R332

CRI(Ra): 95
Power: 20W
Power Source: 7.2-12V DC, 100-240V AC
Color Temperature: 5600K
Illumination(LM): 2470LM
Illumination(LUX): 2220@1M
Brightness Control: Dimmer
Dimension: 271*44*222MM
Weight: About 0.75KG



Full ring
same brightness



Left-right contrastive
light effect



LEDGO

The LG-E268C /LG-E116C on camera LED light , ultra soft with two color temperature from 3200K to 5600K , flicker-free , the light is very brightness and not dazzling . With wireless control by APP system and 2.4G remote controller . The best choice for baby shooting , wedding and interview etc.

LG-E268C

Power: 26.8W
Power Source: 15V3A adapter/Sony NP-F750/970 Battery
Color Temperature: 3200K-5600K
Illumination(LM) (luminous min) : 2165LM
Illumination(LUX): 1526@0.5M
Brightness Control: Wifi,2.4G and Dimmer
Dimension: 350*240*15MM
Weight: About 0.94KG



LG-E268C LED PAD LIGHT

Bi-color.Ultra soft . Ultra thin


LG-E116C LED PAD LIGHT

Bi-color.Ultra soft . Ultra thin

- Wifi , 2.4G remote and button control
- Professional digital display screen to show color temperature, address code and power level
- Bi-color: button control from 3200K to 5600K
- Control button of brightness/color temperature
- Powered by battery or DC adapter

LG-E116C

Power: 11.5W
Power Source: 15V DC , Sony NP-F750/970 Battery
Color Temperature: 3200K-5600K
Illumination(LM): 1873LM
Illumination(LUX): 750@0.5M
Brightness Control: Wifi,2.4G and Dimmer
Dimension: 173*118*15MM
Weight: About 0.23KG

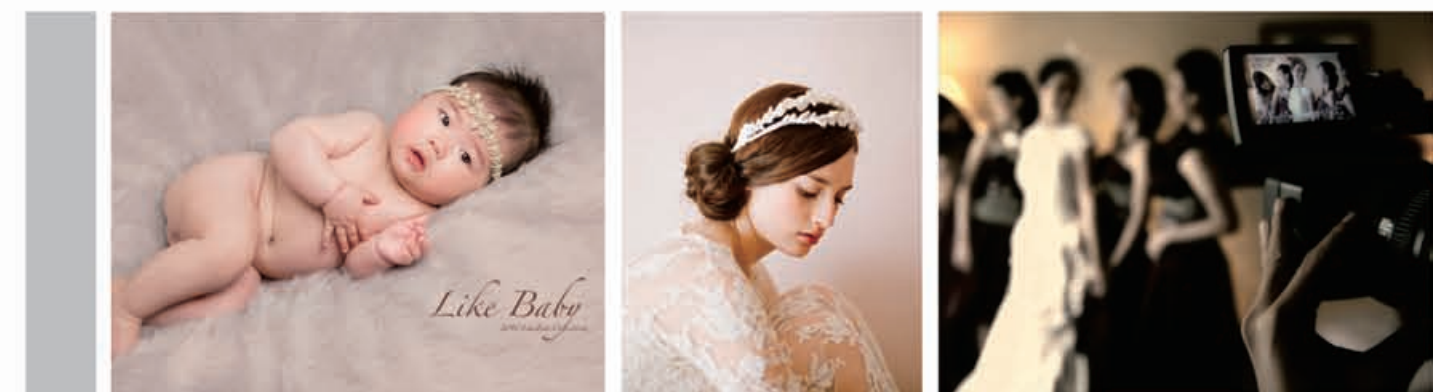

Portable Cases

LED 3Kits Suitcase

LG-D3II

Material :Cloth,PVC

Dimension : 61cm*35cm*46cm

Weight : About6.2kg

Packed items :

3 sets of LED600 or

3 sets of LED900 or

3 sets of LED1200



Metal Trolley Case

LG-M3

Material :MDF, Metal

Dimension : 62.1cm*46.8cm*51.3cm

Weight : About16kg

Packed items :

3 sets of LED600+3pcs of NG-L216 or

3 sets of LED900+3pcs of NG-L216 or

3 sets of LED1200+3pcs of NG-L216



Three Lamps Trolley Case

LG-S3

Material :Cloth,Plastic board

Dimension : 110cm*43cm*25cm


Weight : About7.6kg

Packed items :

3 sets of LED600+3pcs of NG-L216 or

3 sets of LED900+3pcs of NG-L216 or

3 sets of LED1200+3pcs of NG-L216

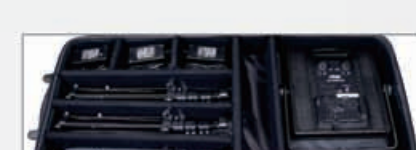

1600H case 1pc 600# LED light

1900H case 1pc 900# LED light

11200H case 1pc 1200# LED light

2600H case 2pcs 600# LED light

2900H case 2pcs 900# LED light

21200H case 2pcs 1200# LED light

LED 2Kits Suitcase

LG-T2

Material :Cloth,PVC

Dimension : 61cm*24cm*50cm

Weight : About4.3kg

Packed items :

2 sets of LED600+3pcs of NG-L216 or

2 sets of LED900+3pcs of NG-L216 or

2 sets of LED1200+3pcs of NG-L216



LED 3Kits Suitcase

LG-T3

Material :Cloth,PVC

Dimension : 61cm*35cm*50cm

Weight : About6.3kg

Packed items :

3 sets of LED600+3pcs of NG-L216 or

3 sets of LED900+3pcs of NG-L216 or

3 sets of LED1200+3pcs of NG-L216



LED 2Kits Suitcase

LG-D2

Material :Cloth,PVC

Dimension : 61cm*24cm*40cm

Weight : About3.6kg

Packed items :

2 sets of LED600 or

2 sets of LED900 or

2 sets of LED1200



LED 3Kits Suitcase

LG-D3

Material :Cloth,PVC

Dimension : 61cm*35cm*40cm

Weight : About5.2kg

Packed items :

3 sets of LED600 or


3 sets of LED900 or


3 sets of LED1200

LEDGO

Accessories

LG-1.2D Cable Dimmer Controller		LG-V12 External Battery Base For Sony V-lock Battery	
LG-RC Wireless Dimmer Controller Distance of Control: 15M		LG-P12 External Battery Base For Anton Battery or Panasonic Battery	
LG-RL Wireless Receiver Distance of Control: 15M		LG-6AA battery box It can contain 6pcs AA battery or Ni-MH battery suitable for LED light with Sony NP-F socket.	
LG-2.4G Romote controller Channel :512 Distance of control: 15M		LG-CGR For Panasonic CGR-D battery	
		LG-3E For Nikon battery	
		LG-E8 For Canon E8 battery	
		LG-E6 For Canon E6 battery	
LG-WR WirelessChannel :512 Distance of control: 15M		LG-AC2 AC adapter	

LG-B08 Hotshoe adapter		LG-1501 barndoors Suitable for LG-B150 On Camera Light	
LG-B09 Metal Clamp		LG-1504 barndoors Suitable for 4pcs LG-B150 On Camera Light	
LG-WNJ Metal Clamp			
LG-D01 Light Hanger Max.height:11cm			
LG-B11 Connection Bracket Size: 11 Inch		Soft Box for: LG-600 value series lights LG-900 value series lights LG-600 professional series lights LG-900 professional series lights LG-1200 professional series lights	
LG-B12 Connection Bracket Size: 7 Inch			
LG-D3304 Rail System Size: 3m*3m			



MODEL NO.	CN-1126FA
	1100mm
	2160mm
	1100mm
	19.2kg
SECTION	2
	35,40
LEG	25
	5kg
	1pcs
	620mm
	2600mm
	1800mm



MODEL NO.	CN-K-1 (Assembled)
	1450mm
	3280mm
	1450mm
	8.1kg
SECTION	3
	25,30,35 16
LEG	25
	10kg
	1pcs
	480mm
	1200mm
	2200mm



MODEL NO.	CN-7060A	CN-7070A	CN-3000F	CN-6800
	1250mm	1950mm	1400mm	350mm
	3100mm	5835mm	3100mm	350mm
	1180mm	1800mm	1400mm	530mm
	7.9kg	22.5kg	8.0kg	4.9kg
SECTION	3	4	3	/
	25,30,35	30,36,42,48	30,35,40	/
LEG	20x20mm	25x25mm	25x25mm	20x40mm
	10kg	20kg	12kg	30kg
	2pcs	1pcs	2pcs	2pcs
	530mm	890mm	620mm	550mm